

SDHT 2000 - SUPER DIGITAL HAND TESTER

Our most accurate and heavy-duty hand tester has "smart" interchangeable load cells. This tester can measure grams to two decimal places, change load cells, and test up to 2,000 pounds. Its rugged two-post design minimizes frame deflection and gives you the most versatility and productivity in a single tester. It has a 13" stroke, an 18" range and can test parts up to 8" in diameter.

The SDHT 2000 is made from a combination of billet aluminum and precision ground steel parts. The rack-and-pinion drive is lever (standard) or hand-wheel operated (optional). The tester is equipped with two positive stops to be used for repetitive testing and comes standard with a 0.438" Ø thru-hole for centering shafts to support buckling type compression springs, as well as 5/8-18 tooling holes for convenient fitting.

The SDHT 2000 also includes Limit lights for easy part sorting and a statistical summary printout that includes a histogram and data run chart. Two-Point with Rate Software allows you to test two points with spring rate calculation in one deflection of the spring.

Standard Features:



- Compression testing of force and length
- Tracking or peak modes (2,000 samples / sec)
- Load cell and frame deflection compensation
- Mechanical and software overload protection
- Built-in shunt calibration verification
- Backlit digital LCD display of force and length
- Wipe-clean embossed key faceplate
- Push button force and length zeroing
- Push button English or metric unit selection
- User programmable filter
- Length / force offset
- Customizable print headings
- Front panel digital calibration
- NIST traceable calibration
- Rigid two column design
- Smart interchangeable load cells
- Internal 8-hour battery for portable use
- RS 232 data communications port
- Statistical summary printout
- Built-in 1,800 test point data logger
- Complete computerized tester diagnostics
- 20-bit internal force resolution

SDHT 2000 - Force Specifications			
Part No.	Capacity	Resolution	
		0-20% FS	20-100% FS
025-0000-0394-01	2 lb	0.00002 lb	0.0002 lb
	907 g	0.01 g	0.1 g
	8.9 N	0.0001 N	0.001 N
025-0000-0394-02	11 lb	0.0002 lb	0.002 lb
	5 kg	0.1 g	1 g
	49 N	0.001 N	0.01 N
025-0000-0394-03	22 lb	0.0005 lb	0.005 lb
	10 kg	0.2 g	2 g
	98 N	0.002 N	0.02 N
025-0000-0394-04	66 lb	0.001 lb	0.01 lb
	30 kg	0.5 g	5 g
	294 N	0.005 N	0.05 N
025-0000-0394-05	110 lb	0.002 lb	0.02 lb
	50 kg	0.001 kg	0.01 kg
	489 N	0.01 N	0.1 N
025-0000-0394-06	200 lb	0.005 lb	0.05 lb
	91 kg	0.002 kg	0.02 kg
	890 N	0.02 N	0.2 N
025-0000-0433-00	750 lb	0.02 lb	0.2 lb
	340 kg	0.01 kg	0.1 kg
	3,336 N	0.1 N	1 N
025-0000-0433-01	1,500 lb	0.1 lb	1 lb
	680 kg	0.05 kg	0.5 kg
	6,672 N	0.5 N	5 N
025-0000-0433-02	2,000 lb	0.1 lb	1 lb
	907 kg	0.05 kg	0.5 kg
	8,896 N	0.5 N	5 N

Accuracy = ± Resolution x 2

SDHT 2000 - Length Specifications		
Capacity	Standard Resolution	
	Resolution	Accuracy (±)
2, 11, 22, 66, 110 & 200 lb	0.0005 in	0.001 in
	0.01 mm	0.02 mm
750, 1,500, & 2,000 lb	0.0005 in	0.002 in
	0.01 mm	0.04 mm

Accuracy = ± Resolution x 2

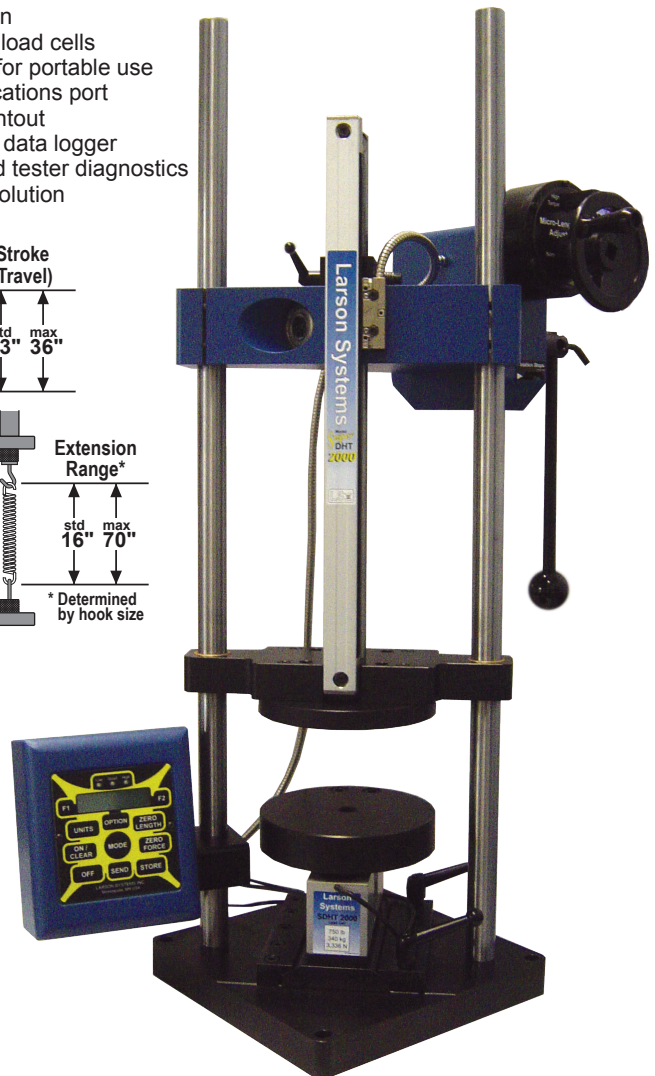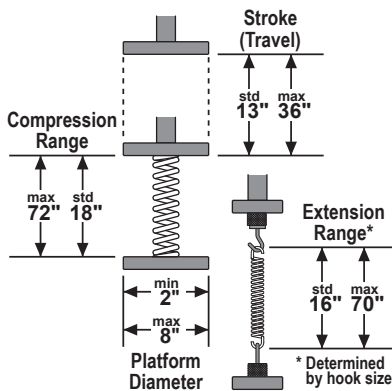

Larson Systems Inc.
10073 Baltimore Street NE
Minneapolis, MN 55449-4425

763-780-2131
877-780-2131
763-780-2182 (Fax)

info@larsonsystems.com
www.larsonsystems.com



060-6000-0071-13