



Valve Spring Tester

V200
V750
V1500

The Valve Spring Tester has a rugged cast-aluminum and steel frame, precision rack-and-pinion drive with adjustments for wear and convenient hand operation to apply force and adjust length. It features a two-line backlit LCD display of force and length and has deflection compensation for accurate readings at all times. Optional valve testing, sorting and certifying software makes it easy to certify a set of matched springs in minutes, without guesswork.

Standard Features:

- 5" range / stroke
- Up to 4" Ø platforms (2" standard)
- Standard 0.001" length resolution
- Compression testing of force and length
- High resolution and accuracy
- Load cell and frame deflection compensation
- Mechanical and software overload protection
- Digital calibration and linearization
- Backlit digital LCD display of force and length
- Wipe-clean embossed key faceplate
- Push-button force and length zeroing
- NIST traceable digital calibration

Factory Options:



- RS 232 / USB output, DHT Family

Accessories:

Part No.	Item
025-0000-0225-00	Thru-Rod Support Kit (1/16" to 1/8" Ø x 6")
025-0000-0485-00	4" Ø Platforms / Thru-Rod Support Kit (1/16" to 11/16" Ø x 8")
025-0000-0191-00	4" Ø Platforms (Pair for 5/16-18 Mount)
025-0000-0293-00	Single Stop Rod
025-0000-0333-00	Double Stop Rod
025-0000-0294-00	NiCad Rechargeable Battery (4-8 hours per charge)
059-1000-0026-00	Dust Cover - 5" Range Rods
025-0000-0487-03	Traveling Case
025-0000-0783-00	8 Piece Valve Spring Retainer Set

Software Options:

Part No.	Item
050-0000-0075-00	SSS - Statistical & Spreadsheet Interface Software
050-0000-0140-00	Excel Templates for Valve Spring Set Building and Certification
050-1000-0060-00	Spring Data Collector Software

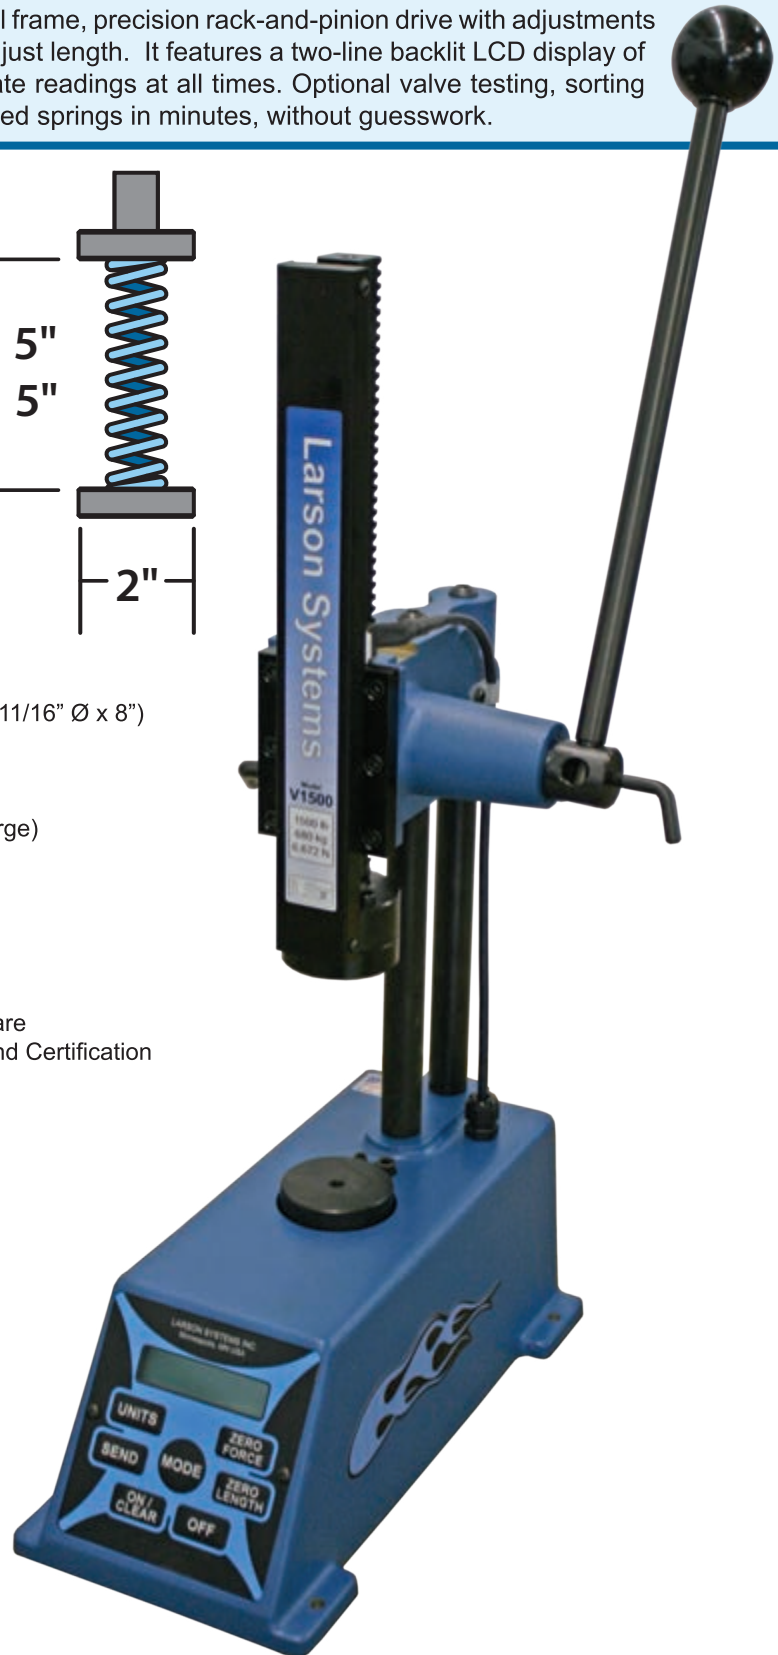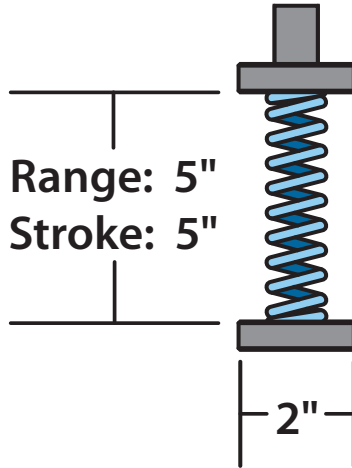

Force Specifications		
Part No.	Capacity	Resolution
V200 050-0000-0109-04	200 lb	0.1 lb
	91 kg	0.05 kg
	890 N	0.5 N
V750 050-0000-0109-02	750 lb	0.5 lb
	340 kg	0.2 kg
	3,336 N	2 N
V1500 050-0000-0109-03	1,500 lb	1 lb
	680 kg	0.5 kg
	6,672 N	5 N
Accuracy = ± Full Scale Resolution x 2		

Length Specifications	
Resolution	Accuracy (±)
0.001 in	0.005 in
0.02 mm	0.1 mm



Larson Systems Inc.

13847 Aberdeen Street NE
Ham Lake, MN 55304-6789

763-780-2131
763-780-2182 (Fax)

info@larsonsystems.com
www.larsonsystems.com



060-6000-0053-01D